

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Method for the production of a foamed slag in a metal bath

(51)⁶ International Patent Classification(s)
C21C 5/52 (2006.01) 20060101AFI2007080
C21C 5/52 9BHEP
PCT/EP2007/000291

(21) Application No: 2007211649 (22) Application Date: 2007.01.15

(87) WIPO No: WO07/087979

(30) Priority Data

(31) Number	(32) Date	(33) Country
10 2006 004 532.7	2006.02.01	DE

(43) Publication Date : 2007.08.09

(71) Applicant(s)
SMS DEMAG AG

(72) Inventor(s)
Karbowniczek, Miroslav; Reichel, Johann; Rose, Lutz

(74) Agent/Attorney
Griffith Hack, Level 3 509 St Kilda Road, Melbourne, VIC, 3004

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum
Internationales Büro



(43) Internationales Veröffentlichungsdatum
9. August 2007 (09.08.2007)

PCT

(10) Internationale Veröffentlichungsnummer
WO 2007/087979 A1

(51) Internationale Patentklassifikation:
C21C 5/52 (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2007/000291

(22) Internationales Anmeldedatum:
15. Januar 2007 (15.01.2007)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
10 2006 004 532.7 1. Februar 2006 (01.02.2006) DE

(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von
US): SMS DEMAG AG [DE/DE]; Eduard-Schloemann-
Strasse 4, 40237 Düsseldorf (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): REICHEL, Johann
[DE/DE]; Bockumer Strasse 368, 40489 Düsseldorf (DE).

ROSE, Lutz [DE/DE]; Im alten Bruch 19, 47259 Duisburg
(DE). KARBOWNICZEK, Miroslav [PL/PL]; ul. Armii
Krajowej 7/147, 30 - 150 Krakow (PL).

(74) Anwalt: KLÜPPEL, Walter; Hemmerich & Kollegen,
Hammerstrasse 2, 57072 Siegen (DE).


(81) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare nationale Schutzrechtsart): AT, AG, AI,
AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS,
LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY,
MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS,
RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare regionale Schutzrechtsart): ARIPO (BW,

[Fortsetzung auf der nächsten Seite]

(54) Title: METHOD FOR THE PRODUCTION OF A FOAMED SLAG IN A METAL BATH

(54) Bezeichnung: VERFAHREN ZUR HERZUGUNG EINER SCHAUMSCHLACKE IN EINER METALLISCHEN
SCHMELZE

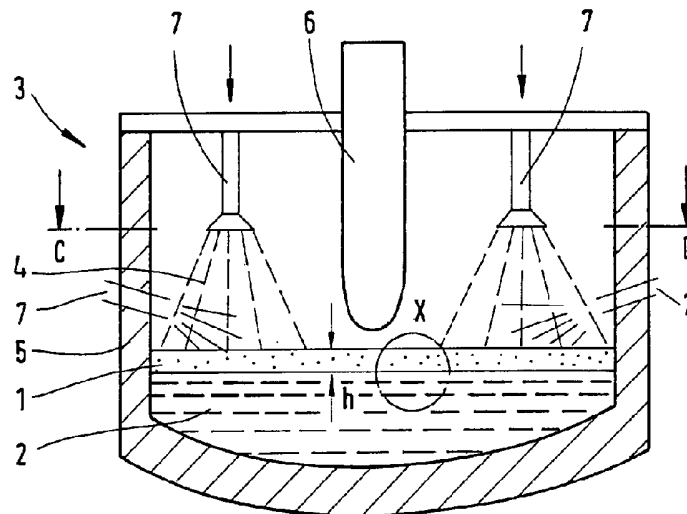

(57) Abstract: The invention relates to a method for producing a foamed slag (1) on a metal bath (2) in a metallurgical furnace (3). According to said method, a mixture (4) containing at least one metal oxide and carbon is introduced into the furnace (3), the metal oxide is reduced by means of the carbon below the slag (1) that is located there, and the gases produced during the reduction process form bubbles such that the slag is foamed. In order to optimize the formation of foamed slag, the mixture (4) is delivered into the furnace (3) in such a way that a desired height (h) or a desired section of the height (h) of the layer of foamed slag (1) is generated or maintained.

[Fortsetzung auf der nächsten Seite]



GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Veröffentlicht:

— mit internationalem Recherchenbericht

— vor Ablauf der für Änderungen der Ansprüche geltenden Frist; Veröffentlichung wird wiederholt, falls Änderungen eintreffen

Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.

(57) Zusammenfassung: Die Erfindung betrifft ein Verfahren zur Erzeugung einer Schaumslagge (1) auf einer metallischen Schmelze (2) in einem metallurgischen Ofen (3), bei dem ein zumindest ein Metalloxid und Kohlenstoff enthaltendes Gemisch (4) in den Ofen (3) eingegeben wird, wobei unterhalb der dort befindlichen Schlackge (1) das Metalloxid durch den Kohlenstoff reduziert wird und wobei die bei der Reduktion entstehenden Gase in der Schlackge Blasen bilden, wodurch die Schlackge aufgeschäumt wird. Um die Bildung von Schaumslagge optimal zu gestalten, ist erfindungsgemäß vorgesehen, dass die Zugabe des Gemisches (4) in den Ofen (3) so erfolgt, dass eine gewünschte Höhe (h) bzw. ein gewünschter Bereich der Höhe (h) der Schicht der Schaumslagge (1) entsteht bzw. erhalten bleibt.

METHOD FOR THE PRODUCTION OF A
FOAMED SLAG IN A METAL BATH

5 The invention concerns a method for producing a
foamed slag in a metal bath in a metallurgical furnace, in
which a mixture that contains at least a metal oxide and
carbon is introduced into the furnace, where below the
slag present in the furnace, the metal oxide is reduced by
10 the carbon and where the gases formed during the reduction
form bubbles in the slag, thereby foaming the slag.

A method of this general type is disclosed by WO
2004/104232 A1. This previously known method can be used
to produce a foamed slag on a metal bath, for example, on
15 a bath composed of stainless metal. During the melting of
the solid metal in an electric arc furnace, a slag forms
that can contain a large fraction of Cr oxide. The
concentration of this fraction often reaches values of
greater than 30%. Due to their composition, slags of this
20 type cannot be liquefied and foamed to the desired extent
with the prior-art method.

The cited document describes the addition of a
mixture that contains at least a metal oxide and carbon to
the metal bath. In addition, the mixture can contain an
25 iron carrier material and a binder. The mixture can be
added to the bath compressed and in the form of pellets or
briquettes. If the mixture is introduced into the region
between the metal bath and the slag layer, it can
chemically react there, and a metal oxide reduction
30 process starts to occur. This process of reduction of the
metal oxide with the carbon leads to the formation of
gaseous carbon monoxide (CO), which results in bubble
formation, which produces foaming of the slag.

The advantage of producing a foamed slag consists in the following: During the operation of an arc furnace, the charge, e.g., the scrap to be melted down, is melted in the furnace by means of the arc of the electrodes. In this connection, the slag fulfills not only its primary function of removing undesired constituents from the metal bath but also a protective function due to its foamed state. Specifically, the foamed slag at least partially fills the space between the ends of the electrodes and the surface of the molten metal and thus protects the refractory lining of the furnace from radiant energy of the electric arc.

Due to the low thermal conductivity of the foamed slag, the radiation of the electric arc towards the wall of the arc furnace is greatly reduced, and thus the energy input into the metal bath is improved.

Another advantage of the foamed slag is its noise muffling effect. The covered or enveloped electric arc thus emits less noise into the surroundings, which improves the environmental conditions in the vicinity of the furnace.

Although it is possible to produce a foamed slag with the prior-art method, a disadvantage is that exact control of the amount of foamed slag is difficult.

Therefore, the objective of the invention is to propose a method of the aforementioned type with which this disadvantage can be avoided. In other words, the objective of the invention is a method for producing foamed slag that can be better regulated or automatically controlled to produce an optimum amount of foamed slag.

In accordance with the invention, this objective is achieved by introducing the mixture that contains at least a metal oxide and carbon into the furnace in such a way

that a desired height or a desired height range of the layer of foamed slag develops and is maintained.

In other words, the height of the layer of foamed slag is systematically maintained at a desired level. A height range is understood to mean a permissible tolerance range for the height of the layer of foamed slag.

The mixture can be added either continuously or at predetermined time intervals.

An especially important aspect of the invention is the selection of the correct dosage of the mixture. It was found that optimum conditions for foaming prevail when the mixture is added in an amount of 3-20 kg per minute per metric ton of molten metal. The addition of the mixture at a rate of 5-15 kg per minute per metric ton of molten metal is especially preferred.

It was found that the area-specific delivery of mixture is also an important parameter. Therefore, in a modification of the invention, the mixture is added in such a way that an amount of mixture of 15-35 kg/m² is maintained on the surface of the metal bath. An amount of 20-30 kg/m² is especially preferred.

It is important for the mixture to act in the correct place. Therefore, it is advantageous to introduce the mixture between the metal bath and the slag.

An electric arc furnace or melting unit with electrodes is usually used as the metallurgical furnace. In this regard, it can be especially advantageous if, with a furnace wall with an essentially circular design as viewed from above and with an essentially central arrangement of at least one electrode of the furnace, the mixture is added to an annular area between the electrodes and the wall. It has been found to be advantageous if the mixture is added in the vicinity of the radial center of

this annular area.

As is already well known in itself, it is possible to use a mixture that contains not only the metal oxide and carbon but also a carrier material composed of iron and chromium. In addition, it may contain a binder. The handling of the mixture is facilitated if it is present in the form of briquettes or pellets.

The procedure of the invention makes it possible for the amount of foamed slag to be held within desired limits, so that the advantageous effect of the foamed slag can be optimally exploited.

An embodiment of the invention is shown in the drawings.

-- Figure 1 shows an electric arc furnace along sectional line A-B in Figure 2.

-- Figure 2 shows the electric arc furnace along sectional line C-D in Figure 1.

-- Figure 3 shows detail X in Figure 1.

-- Figure 4 shows the height h of the layer of foamed slag as a function of time.

The electric arc furnace 3 illustrated in Figures 1 and 2 is used to melt a metal charge, i.e., to produce a metal bath 2. A layer of slag 1 is located on top of the metal bath 2. In the present case, the slag is to be foamed in order to realize the advantages cited above.

For this purpose, a mixture 4 that contains a metal oxide and carbon is added through suitable feeding devices 7. The mixture may also contain an iron-containing carrier material and a binder. The mixture is preferably compressed into briquettes or pellets. The broken lines running from the feeding devices 7 towards the metal bath 2 indicate how the pellets or briquettes are thrown down onto the surface of the slag or molten metal.

The specific gravity or compressed density of the mixture 4 is selected in such a way that optimum bubble formation occurs with respect to the intensity of the reaction and the duration of the process. In this regard, the specific gravity is selected in such a way that after the mixture 4 has been introduced into the furnace 3, it stays between the metal bath 2 and the slag 1. This is indicated in Figure 3, which shows that the pellets or briquettes of mixture 4 sink below the foamed slag 1 and float on the metal bath 1.


Further details on this subject may be found in WO 2004/104232 A1.

As Figures 1 and 3 show, the foamed slag 1 has a height h that is to be maintained at a desired value or in a predetermined tolerance range. As specified above, to accomplish this, a suitable amount of mixture 4 is introduced into the furnace 3 per unit time per unit mass of molten metal 2. This can be done continuously or at predetermined time intervals. As indicated in Figure 4, mixture 4 is introduced into the furnace 3 and thus onto the metal bath 2 at regular intervals (see the arrows labeled with reference number 4). Each addition of mixture 4 results in a chemical reaction, the course of which is indicated by the broken curves. The superposition of all reactions results in an overall reaction, which leads to a well-defined height h of the layer of foamed slag. In particular, the height h is maintained within a tolerance range Δh , as indicated in Figure 4.

The intervals of time at which the mixture 4 is added are chosen in a way that ensures bubble formation that is as continuous as possible as a result of the superposition of the individual partial reactions.

In general, it can be said that the reaction of the mixture proceeds nonlinearly, and the foamed slag is formed accordingly. The mixture 4 introduced between the foamed slag 1 and the metal bath 2 is subject to a
 5 dissolving process with parallel reduction of the iron oxide. As soon as particles of mixture dissolve out of the pellet or briquette due to the ambient temperature, they become covered with a shell of solidified metal. Due to the fact that the mean melting point of the particle is
 10 lower than that of the metal, a melting process and the chemical reactions of the material take place inside the shell. Depending on the temperature difference, the reaction within the shell ends either before or after the melting of the shell. In the former case, the process can
 15 lead to bursting of the particle, which results in the explosive liberation of a CO bubble. In the latter case, the CO bubble will evolve freely in the metal.

In this process, the following chemical reaction, for example, takes place:



Optimum results can be obtained if the mixture is added in an amount of 5-15 kg per minute per metric ton (1,000 kg) of molten metal. A mixture that contains 40-70
 25 wt.%, and preferably 50-60 wt.%, of FeCrHC is preferably used.

Figure 2 further shows that the four feeding devices 7 illustrated here feed the mixture onto an annular area of the slag 1 or metal bath 2. The annular area is formed
 30 on the radially inner side by the circularly conceived envelope 8 surrounding the electrode 6 or electrodes (inner circle). The outer circle 9 of the annular area is adjacent to the wall 5 of the furnace 3. The mixture is

thus introduced in an annular area between the wall 5 of the furnace and the one or more electrodes 6. In this regard, the mixture 4 is preferably added approximately in the radial center between the inner circle 8 and the outer circle 9, as indicated in Figure 2. In a suitable alternative, additions are made by laterally positioned feeding devices.

The area-specific delivery of a certain weight of mixture has also been recognized as an important parameter. The invention proposes a preferred value for this of 20-30 kg of mixture per square meter of surface area.

An optimum foaming result is thus achieved if, first, a favorable frequency of addition of the mixture is selected (i.e., the amount of mixture per unit time per mass of molten metal), second, the mixture is distributed on the surface of the slag or metal bath in a pattern that is as close as possible to an annular pattern, and, finally, the mixture is added in the specified area-specific amount.

This makes it possible to maintain a desired height of foamed slag as a function of time, which has the aforementioned advantageous effect.

List of Reference Symbols

- | | | |
|----|------------|--|
| | 1 | slag / foamed slag |
| 5 | 2 | metal bath |
| | 3 | metallurgical furnace |
| | 4 | mixture |
| | 5 | wall |
| | 6 | electrode |
| 10 | 7 | feeding device |
| | 8 | inner circle (envelope surrounding the electrodes) |
| | 9 | outer circle |
| | h | height of the foamed slag |
| 15 | Δh | tolerance range of the height h |

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

- 5 1. A method for producing a foamed slag (1) in a metal bath (2) in a metallurgical furnace (3), in which a mixture (4) that contains at least a metal oxide and carbon is introduced into the furnace (3), where below the slag (1) present in the furnace, the metal oxide is reduced by the carbon and where the
10 gases formed during the reduction form bubbles in the slag, thereby foaming the slag, wherein the mixture (4) is introduced into the furnace (3) in such a way that a desired height (h) or a desired range of heights (h) of the layer of foamed slag (1) develops
15 and is maintained.
2. A method in accordance with Claim 1, wherein the mixture (4) is added continuously.
- 20 3. A method in accordance with Claim 1, wherein the mixture (4) is added at predetermined intervals of time.
- 25 4. A method in accordance with any of Claims 1 to 3, wherein the mixture (4) is added in an amount of 3-20 kg per minute per metric ton of molten metal (2).
- 30 5. A method in accordance with Claim 4, wherein the mixture (4) is added in an amount of 5-15 kg per minute per metric ton of molten metal (2).
6. A method in accordance with any of Claims 1 to 5, wherein the mixture (4) is added in such a way that an

amount of mixture of 15-35 kg/m² is maintained on the surface of the metal bath (2).

5 7. A method in accordance with Claim 6, wherein the mixture (4) is added in such a way that an amount of mixture of 20-30 kg/m² is maintained on the surface of the metal bath (2).

10 8. A method in accordance with any of Claims 1 to 7, wherein the mixture (4) is introduced between the metal bath (2) and the slag (1).

15 9. A method in accordance with any of Claims 1 to 8, wherein an electric arc furnace or melting unit with electrodes is used as the metallurgical furnace (3).

20 10. A method in accordance with Claim 9, wherein, with a wall (5) of the furnace (3) that has an essentially circular design as viewed from above and with an essentially central arrangement of at least one electrode (6) of the furnace (3), the mixture (4) is added to an annular area between the electrodes (6) and the wall (5).

25 11. A method in accordance with Claim 10, wherein the mixture (4) is added in the vicinity of the radial center of the annular area.

30 12. A method in accordance with any of Claims 1 to 11, wherein the mixture (4) also contains a carrier material composed of iron and chromium.

13. A method in accordance with any of Claims 1 to

- 12 -

12, wherein the mixture (4) also contains a binder.

14. A method in accordance with any of Claims 1 to
13, wherein the mixture (4) is present in the form of
briquettes or pellets.

5

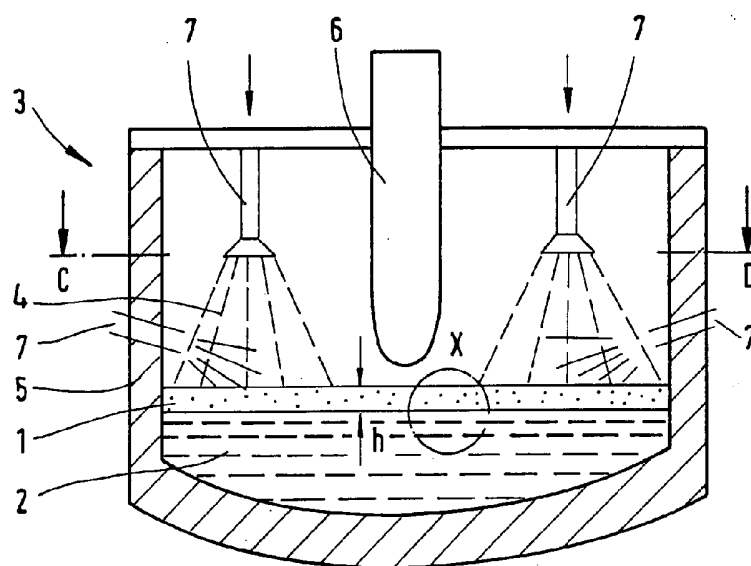


FIG. 1

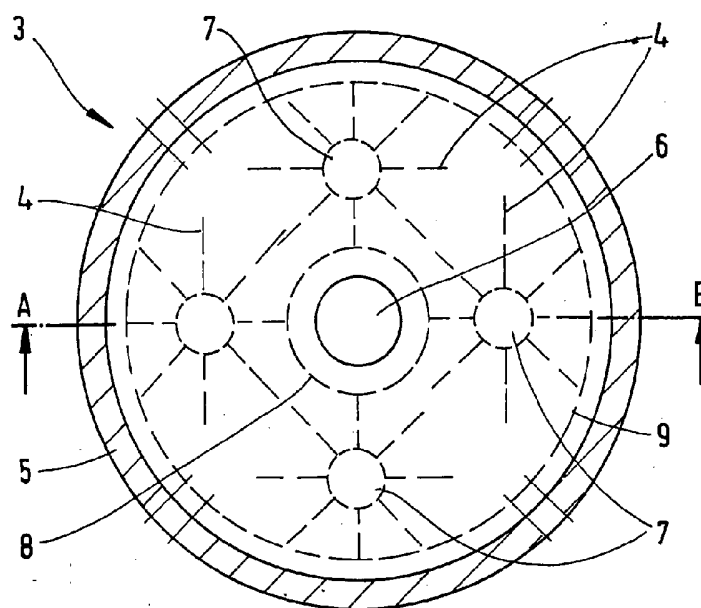


FIG. 2

