

(19)



(11)

EP 3 763 591 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

13.01.2021 Bulletin 2021/02

(51) Int Cl.:

B61B 12/00 (2006.01)(21) Application number: **20185380.1**(22) Date of filing: **10.07.2020**

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

Designated Extension States:

BA ME

Designated Validation States:

KH MA MD TN(30) Priority: **12.07.2019 PL 43056119**

(71) Applicant: **"Ośrodek Narciarski Kotelnica Białczanska" spółka z ograniczoną odpowiedzialnością**
34-405 Białka Tatrzańska (PL)

(72) Inventors:

- Zielinski, Wojciech
31-514 Krakow (PL)
- Sitek, Radosław
31-232 Krakow (PL)
- Czaja, Piotr
34-450 Krościenko nad Dunajcem (PL)
- Karpiel, Grzegorz
31-841 Krakow (PL)

(74) Representative: **Bury & Bury**

Ul. Przyczółkowa 124
02-968 Warszawa (PL)

(54) **SKI LIFT CHAIR WITH HEATING SUBSYSTEM AND CONTROL METHOD FOR HEATING SUBSYSTEM OF SKI LIFT CHAIR**

(57) A ski lift chair comprising a seat (S) with a seat back and a rail (R), provided with a heating system with an electric heater (G), according to the invention is characterised in that the heating system is provided with a channel (P), comprising a fan powered by an engine (D) an traced in at least one part of the rail (R) via a region (H), adapted for giving a support to hands. The heater (G) is placed in a chamber (K), comprising a medium with a high heat capacity, via which runs the channel (P) provided with at least one bimetallic thermal. A first temperature sensor (T1) is placed in the chamber (K). A second temperature sensor (T2) is placed in the region (H). The heating system is provided with a measurement-control system (M), connected to the first temperature sensor (T1), and to the second temperature sensor (T2) and to the engine (D), and is powered from a power back up system (C) comprising a battery of supercapacitors, connected to a charging system (Z) provided with a connector. The heater (G) is connected to the charging system (Z) and to the power back up system (S) via a circuit comprising a controlled key (L) connected to the measurement-control system (M). The object of the invention is also a method for controlling a heating system.

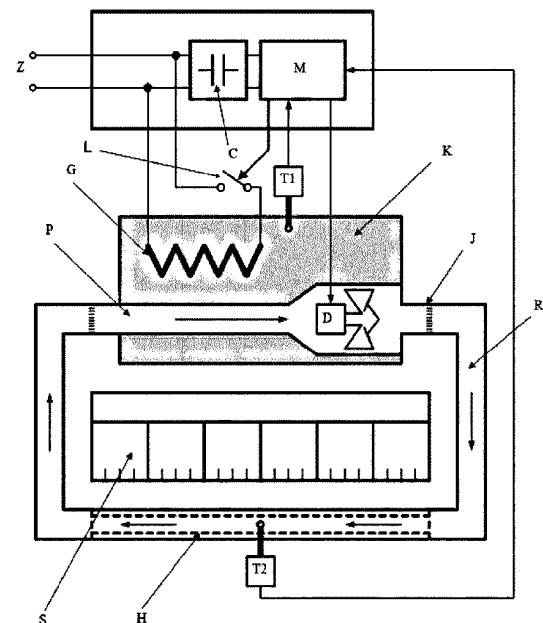


Fig. 1

EP 3 763 591 A1

Description

[0001] Present invention concerns a ski lift chair provided with a heating system and a method for controlling a heating system of a ski lift chair.

[0002] From the American patent application publication no. US20080282928A1 there is known a heated ski lift chair provided with elements heating a passenger's hands. The ski chair is provided with a first power source comprising a photovoltaic cell and a second power source - a battery. A disadvantage of this solution is a troublesome battery charging under conditions in which incident solar radiation (insolation) is insufficient. Such charging would require an additional infrastructure, because a battery capacity suitable for placing on the ski chairs is insufficient for the whole day, and a charging speed is insufficient for charging in short time intervals near stations, where a power supply can be easily provided.

[0003] In the European patent application published under no. EP3197740, a use of supercapacitors as electrical energy storages in ski lift chairs without a power supply is disclosed. Those supercapacitors are charged in designated areas and they are storing the electric energy, used while in motion when there is no access to external power sources. The chairs are provided with wire connectors or wireless connectors, enabling connecting - drawing energy from external power supply systems during the move of the chair. In the invention description an application of an electrical energy stored in supercapacitors i.a. for power supplying to heaters is disclosed. A disadvantage of this solution is that the heater and controlling elements are powered from one power source. Such solution does not provide sufficient energy resources to ensure a comfort during longer routes and it is connected with a risk of cutting off a controlling system from the electric energy during a fast discharge.

[0004] The objective of the invention is to provide a ski lift chair with a safe and reliable heating system of hands operating without external power supply during breaks between charging in charging points.

[0005] A ski lift chair comprising a seat with a seat back and a rail, provided with a heating system with an electric heater according to the invention is characterized in that the heating system is provided with a channel, comprising a fan powered by an engine and traced in at least one part of the rail via a region adapted for giving a support to hands. The heater is placed in a chamber, comprising a medium with a high heat capacity, via which runs the channel which has at least one bimetallic thermal valve. Such configuration enables to separate the medium in the chamber which is heated to a temperature exceeding a comfort temperature, or even threatening a burn injuries of hands and bodies of the passengers, and consequently ensures their safety. Even if an air in the channel will heat up to the temperature threatening the comfort or a health, a circulation thereof will be cut off by the thermal valve. In said chamber a first temperature sensor

is placed, and in said region a second temperature sensor is placed. Furthermore the heating system is provided with a measurement-control system, connected to the first temperature sensor, to the second temperature sensor and to the engine. The measurement-control system is powered from a power back up system comprising a battery of supercapacitors. The power back up system is connected to a charging system provided with a connector connectable to external power supply systems while ski lift chair is in motion. The heater is connected to the charging system and to the power back up system via a circuit comprising a controlled key connected to the measurement-control system. Such configuration enables, in short time intervals in which the charging system is connected to a ski lift infrastructure, storing thermal energy in the chamber and charging the power back up system. During motion of the chair, after disconnecting the power, a possibility of regulating a rate of a heat consumption from the chamber by regulation of engine speed is obtained, pursuant to displays of the temperature sensors. In a situation when energy reserve remains, they can be used for heating up the heater from a power back up system.

[0006] Preferably, the chair is provided with a resistance wire, provided in the region, connected to the power back up system via a second key controlled from the measurement-control system. In such configuration the electric energy reserve can be provided directly to the region, not via the heater, neither the channel nor the fan.

[0007] Preferably the chamber is placed under the seat or behind the seat back, so that it is completely isolated from the passengers, both during a ride and during a boarding and an alighting.

[0008] In a method for controlling a heating system of a ski lift chair to maintain a set temperature, according to the invention, a ski chair according to the invention is used and a measurement-control system reads a temperature from the first sensor and the second sensor. Engine is switched on when the reading of the temperature from the first temperature sensor is higher than a pre-defined value whereas the reading from the second temperature sensor is lower than the set temperature.

[0009] Embodiment of the invention has been described with reference to the drawings, wherein Fig. 1 shows a schematic diagram of the heating system in the chair according to the invention, while Fig. 2 shows the chair with the heating system installed.

[0010] The ski lift chair in the embodiment of the invention is shown in Fig. 2. The chair comprises a seat S with the seat back and a rail R with a heated region H providing the support to hands. Via the rail R with the region H runs a channel P of the heating system for guiding hot air.

[0011] The schematic diagram of the chair with the heating system is shown in Fig. 1. The heating system is provided with an electric heater G placed in the chamber K, located under the seat, comprising a slack wax, which is the medium with the high heat capacity. The heating system is provided with the channel P, compris-

ing the fan powered by the engine D and traced via the rail R. The channel P comprises rotary joints enabling connection to the rail R. Inside the rail, the channel P is traced via the region H adapted for giving the support to hands. In the channel two bimetallic thermal valves are provided - thermostats at the input and at the output.

[0012] As a filling of the chamber different mediums with the high heat capacity can be used, including typical, although due to temperature range and working conditions a water will be a rather troublesome solution. Both conventional substances as well as PMC mediums (*phase-change materials*) can be used, enabling additionally a utilisation of an energy of phase transitions. For the latter, which includes also the slack wax, higher capacities at small weight are obtained.

[0013] The first temperature sensor T1 is placed in the chamber K, and the second temperature sensor T2 is placed in the region H.

[0014] Both sensors are connected to the measurement-control system M by a wired connection in the standard I2C providing an error-resistance in a wide range of working conditions. Also other connections are permitted, including wireless. The measurement-control system M provides a control signal and powering of the engine D, which drives the fan placed in the channel P. In this way, the measurement-control system M is used for regulation of the rate of a heat consumption from the chamber K.

[0015] The measurement-control system M is powered from the power back up system C, comprising a battery of supercapacitors and connected to a charging system Z having a connector connectable to external power supply while the chair is in motion.

[0016] The heater G is connected to the charging system Z and to the power back up system S via a circuit comprising a controlled key L connected to the measurement-control system M.

[0017] Additionally the region H can be provided with a heating resistance wire connected (not shown in the drawings) to the power back up system C via a second key controlled from the measurement-control system M. Such solution enables providing a possible excess of the electric energy directly to the region H in conditions, in which the thermal energy stored in the chamber K will prove to be insufficient.

[0018] The chamber K, due to its fast heating, should be placed out of the range of the passengers - advantageously under the seat S or behind the seat back.

[0019] The system according to the invention enables temperature regulation to a given value in a simple way - by means of the fan controlled by the engine D and the first and the second temperature sensors. By means of the measurement-control system M the temperature from the first temperature sensor T1 and from the second temperature sensor T2 is read and the engine D is switched on, when the reading of the temperature from the first temperature sensor T1 is higher than the pre-defined value and the reading from the second temper-

ature sensor T2 is lower than the set temperature. If the reading from the sensor T1 falls below the pre-defined value it means that the thermal energy is running out and spending the energy on a move of the engine D is unreasonable. Then if the chair is provided with the resistance wire, and still there is an electric energy reserve, it can be used for heating the region H directly by the resistance wire.

[0020] An optimal pre-defined temperature value depends on the chair size and the channel length. In most constructions tested by the inventors this value was in the range from 20 to 40° C.

[0021] The invention provides the ski lift chair with safe and reliable system for heating hands, which can be powered by dedicated systems in chosen regions, e.g. on the stations, thanks to what the bigger changes in infrastructure are avoided. The storage of the energy in the form of heat and not just only in the form of the electric energy, enables to store it more and use it more effectively. The use of the channel enables to move away the energy storage from the passengers and to reduce the risk of burn injuries.

Claims

1. A ski lift chair comprising a seat (S) with a seat back and a rail (R), provided with a heating system with an electric heater (G), **characterised in that** the heating system is provided with a channel(P), comprising a fan powered by an engine (D) and said channel (P) runs inside at least part of the rail (R) via a its region (H), adapted for giving a support to hands, the heater (G) is placed in a chamber (K), comprising a medium with a high heat capacity, wherein via said chamber (K) runs the channel (P) which has at least one bimetallic thermal valve, in the chamber (K) it has a first temperature sensor (T1), in the region (H) it has a second temperature sensor (T2), and furthermore the heating system is provided with a measurement-control system (M), connected to the first temperature sensor (T1), to the second temperature sensor (T2) and to the engine (D), and powered from a power back up system (C) comprising a battery of supercapacitors, connected to a charging system (Z) having a connector connectable to external power supply systems while the ski lift chair is moving, wherein the heater (G) is connected to the charging system (Z) and to the power back up system (C) via a circuit comprising a controlled key (L) connected to the measurement-control system (M).
2. The ski lift chair according to claim 1, **characterised in that**, it has a resistance wire, provided in the region (H), connected to the power back up (C) via a second

key controlled by the measurement-control system (M).

3. The ski lift chair according to claim 1 or 2, **characterised in that**, the chamber (K) is placed under the seat (S). 5
4. The ski lift chair according to claim 1 or 2, **characterised in that**, the chamber (K) is placed behind the seat back. 10
5. A method for controlling a heating system of a ski lift chair to maintain a set temperature, **characterised in that** the ski lift chair is the ski lift chair as defined in any of claims from 1 to 4, wherein measurement-control system (M) 15
reads a temperature from a first sensor (T1) and a second sensor (T2) and
switches the engine (D) on, when the reading of the temperature from the first temperature sensor (T1) 20
is higher than a pre-defined value, whereas the reading from the second temperature sensor (T2) is lower than the set temperature.

25

30

35

40

45

50

55

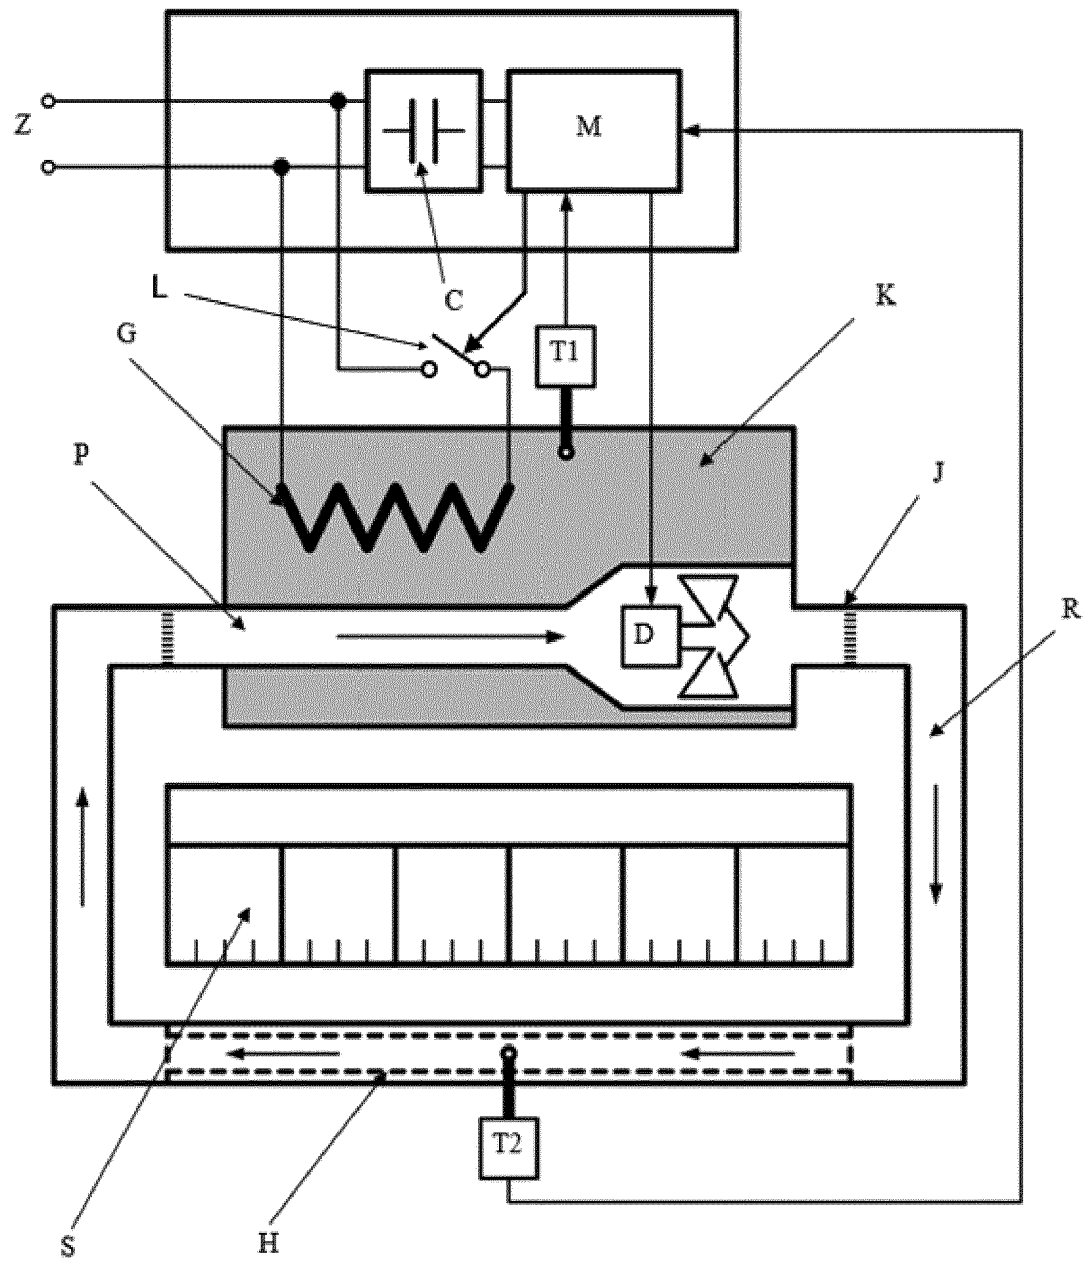


Fig. 1

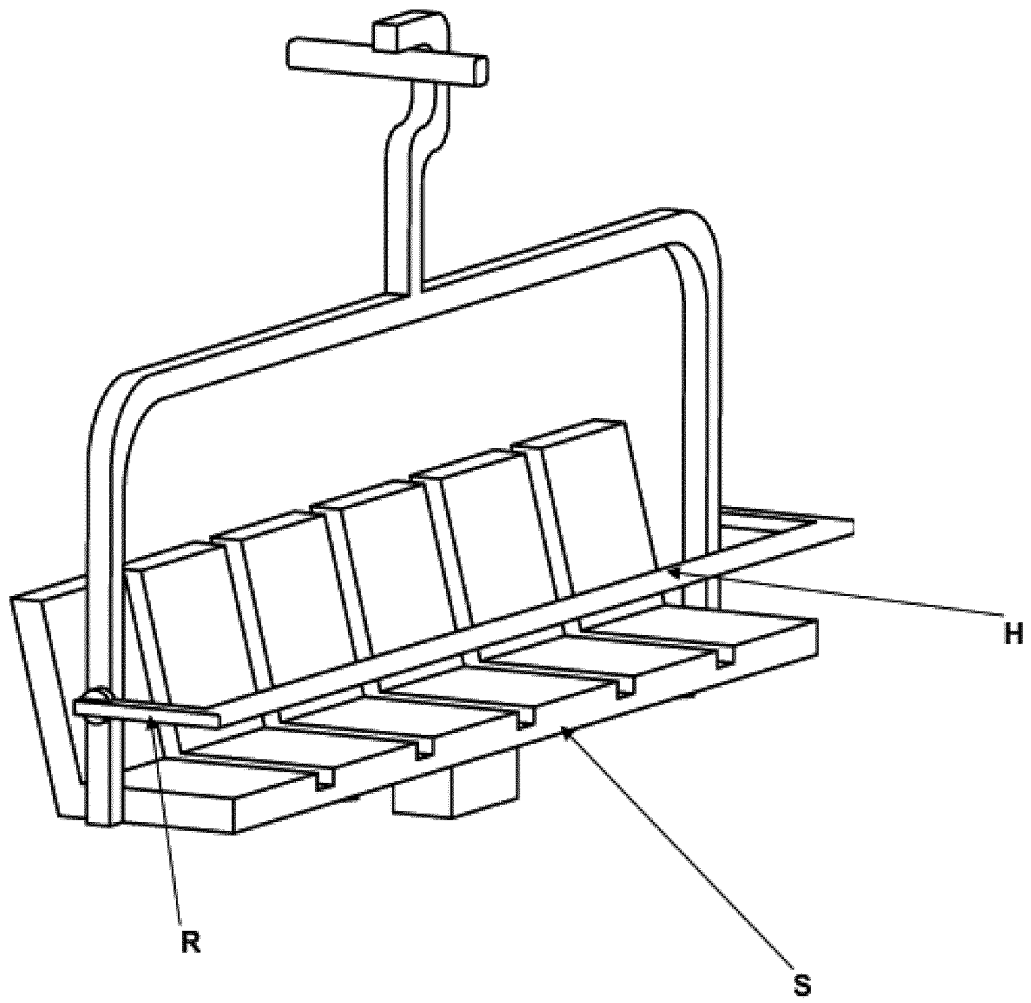


Fig. 2



EUROPEAN SEARCH REPORT

Application Number
EP 20 18 5380

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A,D	US 2008/282928 A1 (FLOM ALLISON [US]) 20 November 2008 (2008-11-20) * paragraphs [0009] - [0011]; figures 3, 4 *	1-5	INV. B61B12/00
A	WO 2016/049550 A1 (ALPINE MEDIA [US]) 31 March 2016 (2016-03-31) * page 3, lines 5-7; figures 1A, 1B *	1-5	
A	EP 2 578 466 A1 (ROLIC INVEST SARL [LU]) 10 April 2013 (2013-04-10) * claim 1; figure 2 *	1-5	
A	US 2006/060104 A1 (HINTEREGGER CHRISTOPH [AT]) 23 March 2006 (2006-03-23) * paragraph [0038] *	1-5	
A	CH 700 020 B1 (BERGMANN THOMAS [CH]) 15 June 2010 (2010-06-15) * paragraph [0017]; figure 1 *	1-5	
			TECHNICAL FIELDS SEARCHED (IPC)
			B61B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 23 October 2020	Examiner Denis, Marco
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 20 18 5380

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-10-2020

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008282928 A1	20-11-2008	NONE	
WO 2016049550 A1	31-03-2016	AU 2015320311 A1 CA 2962600 A1 CN 107249957 A EP 3197740 A1 JP 2017530681 A US 2018229611 A1 WO 2016049550 A1	06-04-2017 31-03-2016 13-10-2017 02-08-2017 12-10-2017 16-08-2018 31-03-2016
EP 2578466 A1	10-04-2013	NONE	
US 2006060104 A1	23-03-2006	AT 500789 A1 AU 2006201891 A1 CA 2519493 A1 CN 1760070 A JP 2006082799 A NZ 542412 A US 2006060104 A1	15-03-2006 10-08-2006 15-03-2006 19-04-2006 30-03-2006 27-04-2007 23-03-2006
CH 700020 B1	15-06-2010	AT 503253 A2 CH 700020 B1 DE 102006008256 A1	15-09-2007 15-06-2010 30-08-2007

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20080282928 A1 [0002]
- EP 3197740 A [0003]